



MTS Landmark®
Servohydraulic Test Systems



MTS Criterion®
Electromechanical Universal Test Systems

ISO 14130 Fibre-Reinforced Plastic Composite – Determination of Apparent Interlaminar Shear Strength by Short-Beam Method

TEST METHOD SUMMARY

Three-point beam flexure testing per ISO 14130, is used to determine the apparent interlaminar shear strength of fiber-reinforced plastic composite materials. The short-beam strength is of interest for screening materials or for quality control of composite materials.

The beam flexure test is performed by placing the specimen symmetrical on the support fixture that is mounted either to a servohydraulic or an electromechanical testing machine. The load is applied to the specimen at mid-span until interlaminar shear failure occurs. The standard addresses fibre-reinforced thermosetting and thermoplastic composite materials.

Solutions for ISO 14130 typically include these types of components:



LOAD FRAME OPTIONS*

The MTS Landmark servohydraulic test systems and MTS Criterion electromechanical universal test systems are ideal for performing accurate and repeatable monotonic testing of fiber-reinforced plastic composite materials per ISO 14130.



The MTS Landmark system's innovative test frame design exhibits superior stiffness and alignment capabilities. The test system integrates the latest MTS servohydraulic technology including precision-machined columns for consistently tight alignment, fatigue-rated MTS actuators with low friction bearings, smooth-ramping hydraulic service manifolds, and SilentFlo™ hydraulic power units are quiet enough to be located directly in the laboratory.

The compact MTS Criterion test system features high-resolution MTS digital controls, linear motion guides for superior alignment, high-speed, low vibration MTS electromechanical drives, optional Dual Zone test space for maximizing efficiency and anti-rotation grip/fixture mounting to minimize fixture misalignment.


CHAMBER OPTIONS*

	
MTS Series 651 Environmental Chambers	MTS Advantage™ Environmental Chamber
<ul style="list-style-type: none"> » Temperature range of -150°C to 540°C (-240°F to 1000°F) » Designed for MTS Landmark systems » Compatible with video extensometers 	<ul style="list-style-type: none"> » Temperature range of -129°C to 315°C (-200°F to 600°F) » Designed for MTS Criterion systems » Compatible with video extensometers

FIXTURE OPTIONS*

	
Short Beam Shear and Three Point Flexure Fixture	MTS 3-Point Bend Fixtures
<ul style="list-style-type: none"> » Recommended to test in accordance with ASTM D2344 » Constructed out of high quality stainless steel » Force capacities 8.9 kN » Loading noses and supports are fixed » Fast and accurate specimen positioning with centering device » Adjustable spans feature English and metric scales » Temperature range of -85° C to 122° C (-120° F to 250° F) 	<ul style="list-style-type: none"> » Recommended to test in accordance with ISO 14130 » Value-priced fixtures for a wide range of flexural tests provides a line of maximum stress » Available in a range sizes with force capacities of 10 kN, 20 kN and 30 kN » Loading noses and supports are fixed » Fast and accurate specimen positioning with centering device » Precision machined rollers are made from corrosion resistant hardened steel for long service life » Adjustable lower spans feature metric scales » Temperature range of -50° C to 150° C (-58° F to 302° F)


SOFTWARE OPTIONS*

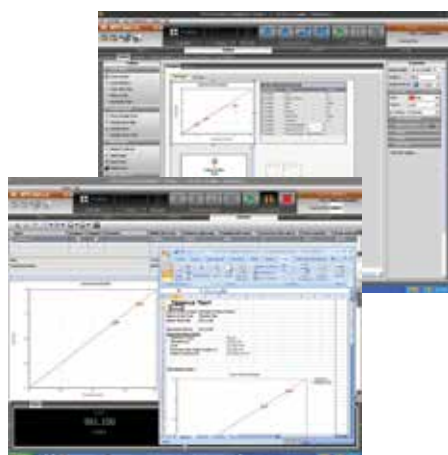

ISO 14130 Fibre-Reinforced Plastic Composite – Determination of Apparent Interlaminar Shear Strength by Short-Beam Method	About MTS TestSuite™ TW
<p>To simplify testing to ISO 14130, MTS has developed a TestSuite™ TW test template that will set-up and run the recommended short-beam test method.</p> <p>Reports can display all of the required calculations including the apparent interlaminar shear strength value.</p> <p>MTS consultants are also available to support your composite applications, test method set-up, and data collection and integration requirements.</p>	<p>The efficient MTS TestSuite TW software provides the versatility required to address unique and complex testing requirements.</p> <p>twe TestSuite TW Elite includes all the test definition capacity and flexibility test designers need to create and edit custom test sequences while accommodating the specific runtime needs of lab personnel.</p> <p>twx TW Express is designed for the test operator and is used to run tests created with TW Elite. This application allows the operator to easily execute even the most complex tests and monitor data or calculated values in runtime views that can be tailored by both test designers and operators.</p>

*NOTE: This technical note is intended to show some of the popular and more common solutions used for this particular application. Most often, additional options are available and necessary to accomplish your more comprehensive test objectives.

APPENDIX - TEST SPECIMEN DETAIL

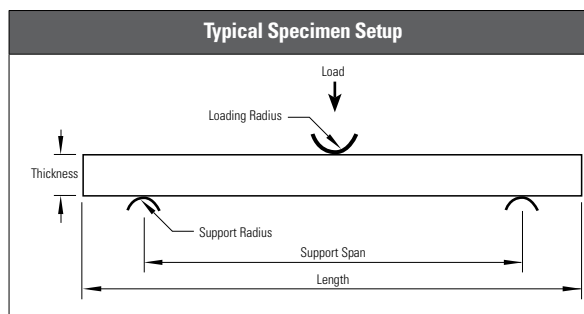

Thickness in mm	Width in mm	Length in mm	Support Span in mm	Support Radius in mm	Loading Radius in mm
2	10	20	Support Span-to-Thickness Ratio (5:1) 10	2	5



MTS Systems
14000 Technology Drive
Eden Prairie, MN 55344-2290 USA
Telephone: 1-952-937-4000
Toll Free: 1-800-328-2255
E-mail: info@mts.com
www.mts.com

ISO 9001 Certified QMS

MTS, MTS Criterion, SilentFlo, and MTS Landmark are registered trademarks, and MTS TestSuite and MTS Advantage are trademarks of MTS Systems within the United States. These trademarks may be protected in other countries. RTM No. 211177.

©2021 MTS Systems
100-361-498 ISO 14130 • Printed in U.S.A. • 09/21