

MTS Alignment Solution

Ensure the accuracy and reliability of test system data

- » Ensures compliance with numerous industry standards:
 - ASTM E1012
 - GE S-450
 - GE S-400
 - ISO 23788
 - NASM1312
- » Features precision fixture, flat or round strain-gaged specimens, PC with software, and data acquisition/conditioning unit
- » Intuitive Alignment Wizard guides user through full sequence of concentric and angular adjustments
- » Compact and portable

MTS offers an efficient, easy-to-implement load train alignment solution to help you drive test machine variability out of the material testing equation. The turnkey MTS Alignment Solution features a precision Model 609 Alignment Fixture, a selection of strain-gaged specimens, and the necessary software, data acquisition and conditioning functionality required to achieve regular, proper alignment on even a large number of material test systems, guaranteeing the accuracy and reliability of test lab data. The MTS Alignment Solution can be used to ensure test system compliance with numerous industry standards, including: ASTM E1012, GE S-450, GE S-400, ISO 23788, and NASM1312.

Model 609 Alignment Fixture


Serving as the mechanical foundation of the MTS Alignment Solution, the precision Model 609 fixture is engineered to facilitate quick and highly accurate material testing system alignment adjustments. A key benefit of this fixture's design is that it allows angular and concentric adjustments to be performed while the load train is fully preloaded, eliminating inaccuracies caused by small changes in alignment that can occur during the preloading process. Additionally, because the fixture remains preloaded at all times, previous alignment adjustments are not lost when small refinements in alignment are required. Model 609 Alignment Fixtures are compatible with all MTS servohydraulic load frames, and can be readily adapted to work with servohydraulic load frames from other manufacturers.

be certain.

Model 709 Alignment Software


Working in concert with the alignment solution's data acquisition/conditioning unit, Model 709 Alignment Software acquires and analyzes data on the bending strain occurring within the strain-gaged specimen and displays it graphically on the alignment solution's laptop computer. Its intuitive interface enables users to accurately verify how much bending strain is occurring, and if necessary, the easy-to-use "Alignment Wizard" guides them through the sequence of Model 609

angular and concentric adjustments needed to achieve test system alignment. Continual scanning of bending strains allows verification and alignment during load cycling. When the alignment procedure is finished, the software can generate an Excel report showing verification of load train alignment resolution for a defined target class. The software can also accept calibrated load signals from the test system controller for generating reports on bending strain at various axial load levels.

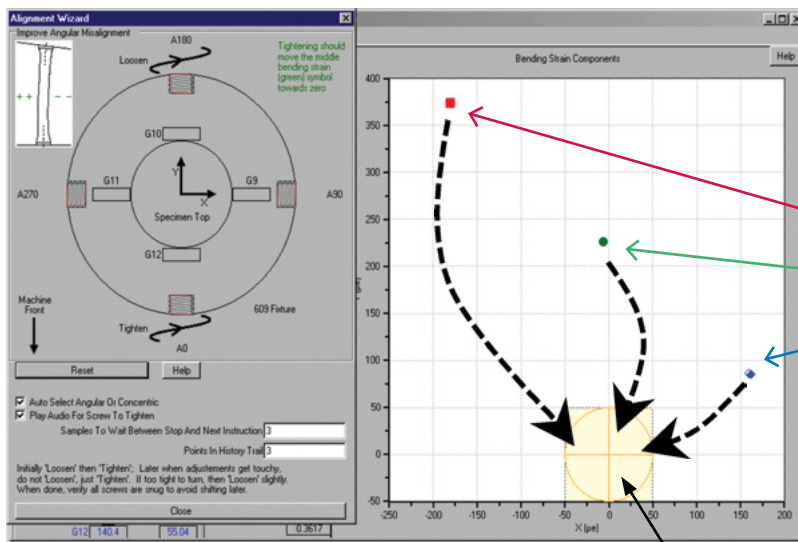

Following software prompts, users adjust concentricity and angularity to bring all bending strains within a 5% bending strain envelope

5% Bending Strain Envelope




Angularity Adjustment



Concentricity Adjustment

Strain-Gaged Specimens

The MTS Alignment Solution includes a selection of both round and flat standardized, strain-gaged specimens. Each alignment specimen features 12 strain gages, optimal for correcting both concentric and angular test system misalignment. Strain gages are bonded to the alignment specimen with oven-cured epoxy for long life and are covered to prevent damage from handling. Alignment specimens are machined from 4340 steel, and heat treated to safely accommodate stresses up to 413 MPa (60,000 psi). The MTS Alignment Solution can also utilize customer-provided 4, 6, 8, and 9 gage specimens.

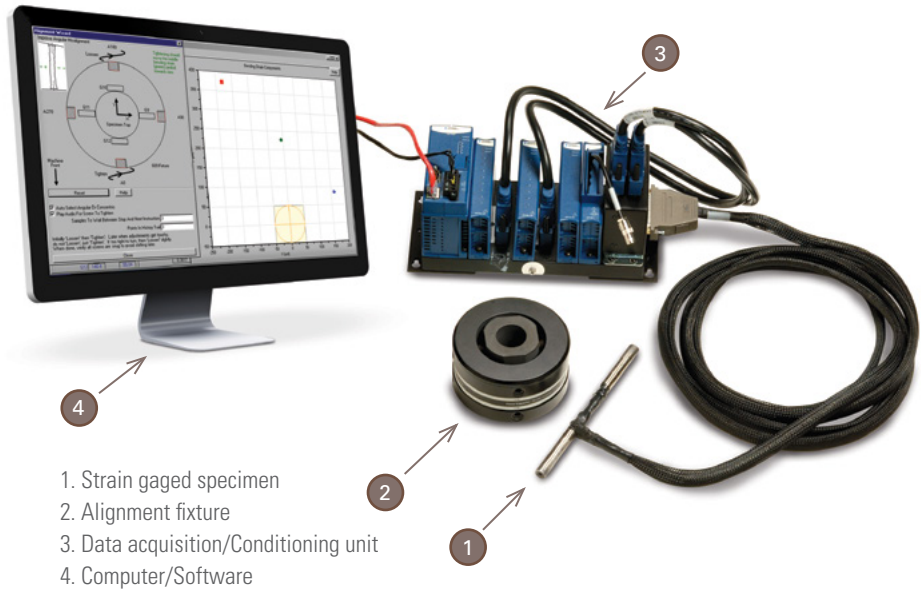

MTS Alignment Solution Specifications

Model 609 Alignment Fixture*						
Model	Load Frame Force Capacity	Height	Diameter	Stud Size/Length	Metric Part Number	US Customary Part Number
609.02A-01	25 kN (5.5 kip)	72 mm (2.81 in)	121 mm (4.75 in)	M12 x 1.25/355 mm (1/2"-20/14.0 in)	049-083-402	049-083-401
609.10A-01	100 kN (22 kip)	72 mm (2.81 in)	121 mm (4.75 in)	M27 x 2/343 mm (1"-14/13.5 in)	049-083-502	049-083-501
609.25A-01	250 kN (55 kip)	80 mm (3.12 in)	162 mm (6.38 in)	M36 x 2/462 mm (1 1/2"-12/18.2 in)	049-083-602	049-083-601
609.50A-01	500 kN (110 kip)	181 mm (7.11 in)	254 mm (10 in)	M52 x 2/686 mm (2"-12/27 in)	051-499-202	051-499-201

*Models listed are for MTS 318 & 312 load frames; contact MTS to add a Model 609 Alignment Fixture to an MTS 370 load frame.

Model 709 Alignment Software*	Part Number
709.20E-03 Alignment Software Perpetual License	056-866-201

*Windows 7/10 compatible.

Strain-Gaged Specimens	Part Number
Round (Metric)	056-651-703
Round (US Customary)	056-651-701
Flat	056-651-702

Model 709 Data Acquisition/Conditioning Units	Part Number
---	-------------



Voltage/Plug	
115 V AC, CE	057-677-606
230 V AC, US Plug, CE	057-677-607
230 V AC, Euro Plug, CE	057-677-608
230 V AC, China Plug, CE	057-677-610

Includes Accredited Calibration.

For other plug options, contact MTS.

Adapter Kit: required information for ordering Model 609 fixture for load frames other than MTS Models 370, 318, & 312

- Force transducer thread size
- Force transducer thread depth
- Crosshead height
- Crosshead through-hole diameter
- Dimensional information of any counter-bores in either the top or bottom of the crosshead

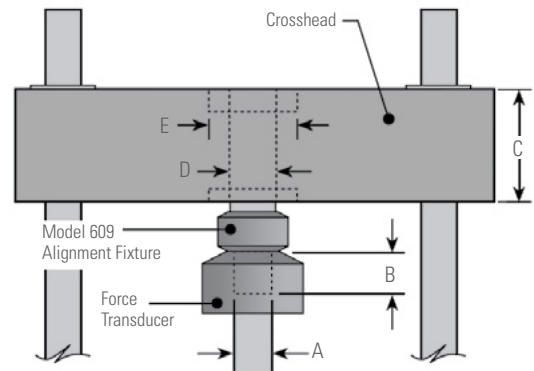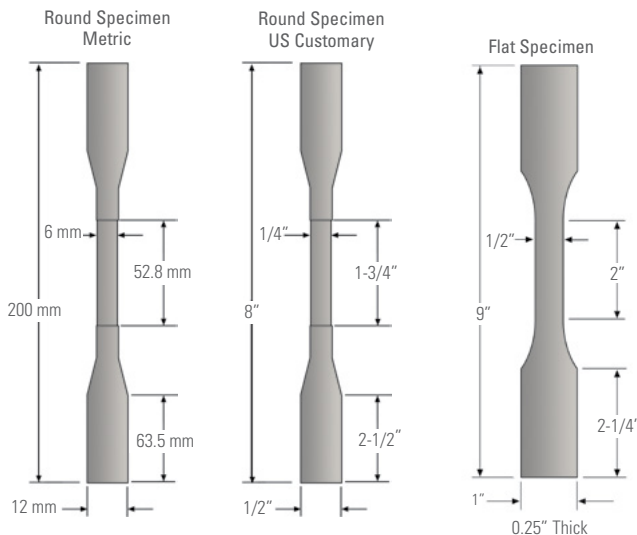

MTS Systems Corporation
 14000 Technology Drive
 Eden Prairie, MN 55344-2290 USA
 Telephone: 1.952.937.4000
 Toll Free: 1.800.328.2255
 Fax: 1.952.937.4515
 E-mail: info@mts.com
 www.mts.com
 ISO 9001 Certified QMS

Specifications subject to change without notice.

MTS is a registered trademark of MTS Systems Corporation within the United States. This trademark may be protected in other countries. RTM No. 211177.

Windows 2000/XP is a registered trademark of Microsoft Corporation.

© 2018 MTS Systems Corporation.
 100-001-531c AlignmentSolution • Printed in U.S.A. • 5/18